

# DTG OR15 OPEN FRONT MULTIDECK

# COSSIGA




### Drainage System Options

- o Pump to waste
- o Electronic evaporator pan

- o Stainless steel construction
- o Four adjustable shelves
- o Ticket strips on shelves
- o Shelf mounted air curtains
- o Under shelf and canopy LED lights
- o Pull down night blind
- o Forced air circulation
- o Integral condenser
- o Removable front grille panel
- o Roll in on castors
- o Climate class M1
- o Hinged front doors - **optional**



Shown with optional frame less hinged acrylic front doors sold as accessory kit

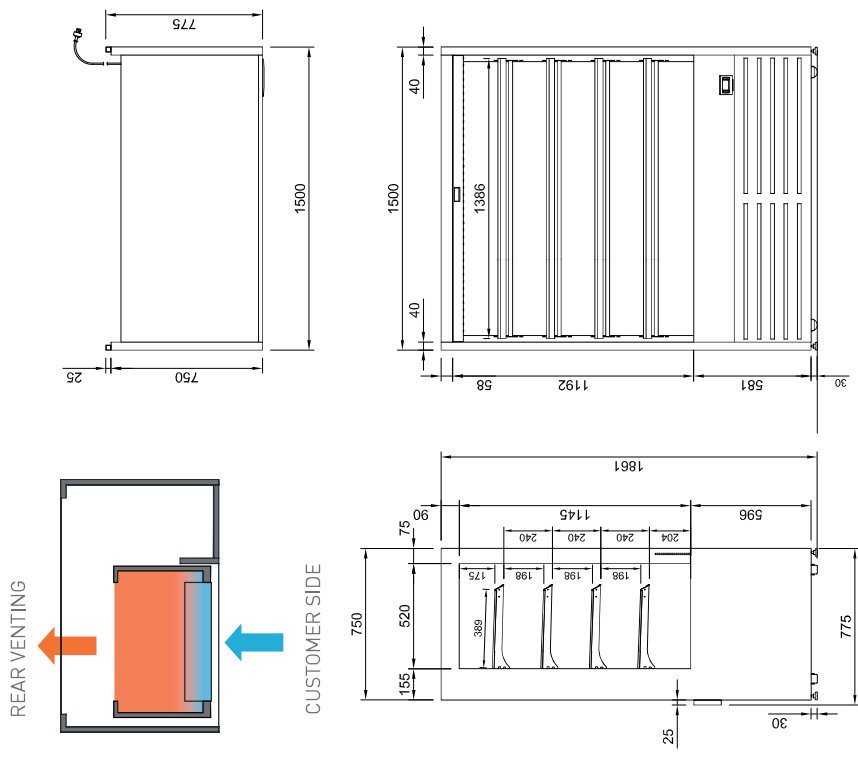

### CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			SHELVING	OPERATING TEMP	SHELF W X D	BASE TRAY W X D	DISPLAY	REFRIGERANT	FREQUENCY	OPERATING CURRENT	POWER	CONNECTION		VOLTAGE	PACKED FOR SHIPPING				
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]										ELECTRICAL POWER CORD	2200MM		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	
DTGOR15	1500	775	1860	298	4 + BASE	DEG C	W X D	M <sup>2</sup>	TEMP CLASS M1	Hz	Amps	Kw	NZ/AUS	UK 13 AMP	Volls	220-240V	1600	830	2030	298

Maximum shelf load weight 15kg spread evenly

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

