

DTG OR6 OPEN FRONT MULTIDECK

COSSIGA




Drainage System Options

- Pump to waste
- Electronic evaporator pan

- Stainless steel construction
- Four adjustable shelves
- Ticket strips on shelves
- Shelf mounted air curtains
- Under shelf and canopy LED lights
- Pull down night blind
- Forced air circulation
- Integral condenser
- Removable front grille panel
- Roll in on castors
- Climate class M1
- Reversible hinged front door - **optional**



Shown with optional frame less hinged acrylic front door sold as accessory kit

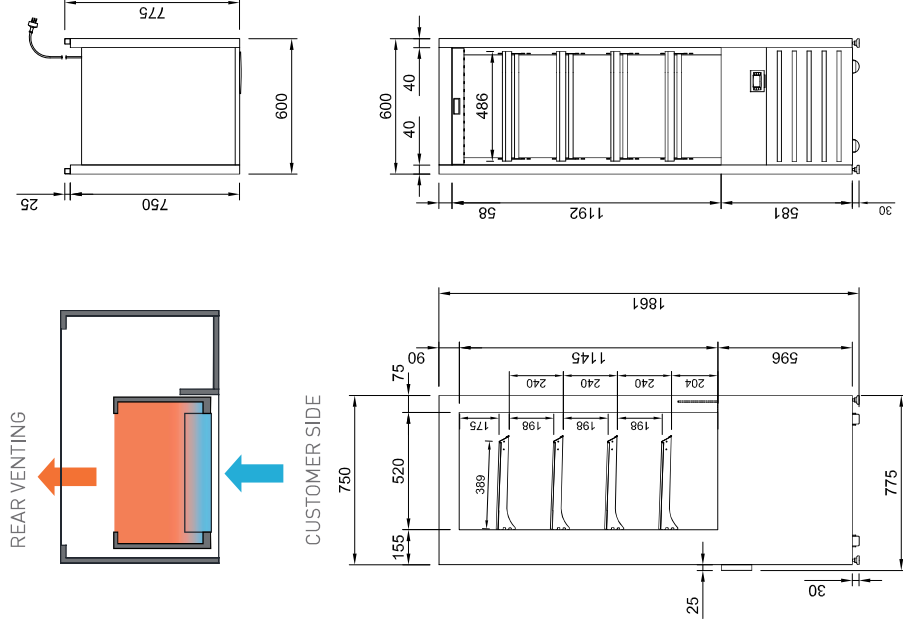

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET		SHELVING	OPERATING TEMP	SHELF TRAY	DISPLAY	REFRIGERANT	FREQUENCY	OPERATING CURRENT	POWER	CONNECTION ELECTRICAL POWER CORD 2200MM	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	W X D	M ²	TEMP CLASS M1	Hz	Amps	Kw	NZ/AUS 10 AMP UK 13 AMP	Volts	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
DTGOR6	600	775	1860	170	520 x 453	0.98	R290	50/60 HZ	5.5	1.04	3 PIN PLUG	220-240V	700	830	2030	180

Maximum shelf load weight 15kg spread evenly



Prior to installation see, installation guidelines, ventilation requirements and drainage options documents