


## iDeck - "Upgrade Your Work!"

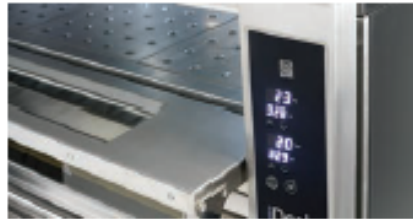

The iDeck line is characterized by intelligent products that are remarkably easy to use, with an excellent quality/price ratio, dynamic design and full functionality. All models are made of stainless steel and are equipped with door with single handrail for easy grip. The cooking floor is Sandblasted refractory brick, just like the more advanced Moretti Forni models. The maximum operating temperature is 450° C: a characteristic that makes iDeck ovens unique in their category.

The PM and PD models are available in 5 different sizes in the single or double baking chambers. Heat is generated through steel-plated elements and electromechanical adjustment of ceiling and floor temp. The IDM and IDD models are also available in 5 sizes, in either the single or double chambers. They are heated using thick steel plated elements. A separate floor and ceiling temp can be set, thanks to the Dual-Temp® Technology. The floor and ceiling power is also adjustable separately thanks to the Smart-Baking® Technology function. All models are available with an optional prover or a standard support on castors.

## iDeck | Electro-Mechanical PM-PD

### Single Deck - PM

#### Standard Features

- Electric single deck oven
- Stainless steel construction
- Easy to use manual controls with temperature thermostat
- Sandblasted cooking floor
- Max temperature 450°C
- Internal lighting
- Spring loaded door with ergonomic handle



Model	Capacity (Ø30cm)	Int. Dim. mm W - D - H	Ext. Dim. mm W - D - H	Weight KG	Power	Price Ex Gst
PM60.60	4	614 x 660 x 140	850 x 921 x 363	80	240V, 1N, 4.2kW, 18A 415V, 3N, 4.2kW, 6A	\$4,800
PM72.72	4 (35cm)	720 x 720 x 140	988 x 1082 x 363	105	415V, 3N, 6kW, 9A	\$5,900

# Double Deck - PD

## Standard Features

- Electric double deck oven
- Stainless steel construction
- Easy to use manual controls with temperature thermostat
- Sandblasted cooking floor
- Max temperature 450°C
- Internal lighting
- Spring loaded door with ergonomic handle



Model	Capacity (Ø30cm)	Int. Dim. mm W - D - H	Ext. Dim. mm W - D - H	Weight KG	Power	Price Ex Gst
PD60.60	8	614 x 660 x 140	850 x 921 x 660	133	240V, 1N, 8.4kW, 35A 415V, 3N, 8.4kW, 12A	\$7,700
PD72.72	8 (35cm)	720 x 720 x 140	988 x 1082 x 660	175	415V, 3N, 12kW, 17A	\$9,500